BUSINESS AND HOME SECURITY

COLOR CONCEALED SECURITY MIRROR CAMERA

PATENTED MIRRORING TECHNOLOGY

FEATURES

- Patented Mirroring Technology Makes Camera Invisible to the Human Eye Yet Allows Camera to Properly View
- Security Mirror Form Factor is Ideal for Commercial/Retail Applications
- Cable Pass-through Wall Mount Bracket Conceals and Protects Connection Cables

SPECIFICATIONS

Image Sensor Type:	1/3" Color Sony CCD Image Sensor
Video Format:	NTSC
Effective Pixels:	NTSC: 510H x 492V(251K)
Horizontal Resolution:	420 TV Lines
Scan System:	NTSC: 525 Lines 2:1 interlace
Sync System:	Internal
S/N Ratio:	More than 48dB without AGC
Iris:	AES
AES Shutter Speed:	NTSC: 1/60 ~ 1/100,000 Sec.
Mini Illumination:	1.5 LUX (AGC On)
Video Output:	Composite 1.2 Vpp @ 75 ohm
Lens/Focal Length/Type:	3.6 mm Fixed
Lens/ Lens Mount:	Fixed
FOV (Diagonal):	92 degrees
Termination:	BNC, Power DC Jack
IR LED/ Night Vision Range:	N/A
Power Requirement:	12 V DC +/- 10%
Power Consumption:	110 mA or 1.4W
Operating Temp Range:	14°~131° F / -10° ~ 55° C
Environmental Rating:	Indoor
Built In Microphone:	No

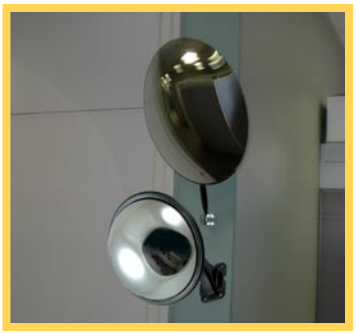

Ceiling flush mountable or wall mountable using included cable pass-through bracket.

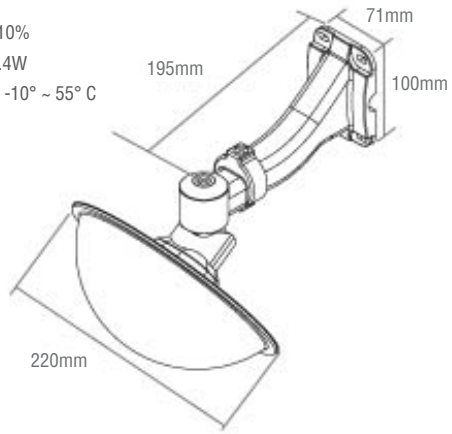

PRODUCT INFORMATION

UPC:	7-78597-01020-6
Package Weight:	1.75kg / 3.86lb
Package Dimensions:	280mm (w) x 225mm (h) x 320mm (d) 11" (w) x 8.89" (h) x 12.59" (d)
Package Cube:	0.02m / 0.715ft
Includes:	1 x Concealed Camera 1 x Cable Pass-through Mounting Bracket (attached)

LOREX®

CNC1020

www.lorexcctv.com

Lorex Technology Inc.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada.

3700 Koppers Street
Baltimore, Maryland 21227,
USA.

©2008 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE

2-18092008